

Product Sales Sheet

# Performance Rally

Performance Rally is a 14.5mm surface tailored for heavy conditioning and is available in both rolls and interlocking tiles.



## Markets

- Fitness
- Sports
- Student Rec

## Applications

- Light Weights
- Moderate Weights
- Strength Equipment
- Cardio
- Tracks
- Functional Training
- Extreme Functional Training

## Benefits

- Durable
- Sustainable
- Ease of maintenance
- Slip-resistant



## Product Options

**Size:**

Available as a standard in rolls and interlocking tiles. All custom options should be discussed with your local agent to determine availability, pricing, minimums, and lead times.



14.5mm (2.5mm+12mm) x 48" (1.2m)



14.5mm (2.5mm+12mm) x 23" (58cm)  
x 23" (58cm)

**Color Options:**

• See website for colors.





## Technical Details

Performance Criteria	Test Standard	Typical Results
Static Load Limit	ASTM F970	0.0009" (@ 250 psi)
Coefficient of Friction	ASTM D2047	> 0.9
VOC Compliant	ASTM D5116	Yes
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	< 1g, 1,000 cycles
Pill Test	ASTM D2859	Pass
Standard Vertical Deformation	ASTM F2772	2.66mm
Surface Effect Slip Resistance	ASTM F2772	Pass
Ball Rebound	ASTM F2772	98.8%
Force Reduction	ASTM F2772	35.7%
Impact Insulation Class*	ASM E492	59
Delta IIC*	ASTM E2179	28

\*Tested on a 6" concrete slab with no ceiling.



35.4%


**Force Reduction**  
Absorption of impact energy



53.7%

**Energy Restitution**  
Useful return of impact energy

Values based on Delttec Test

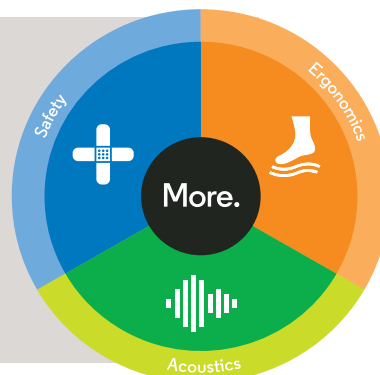

Can a floor  
do more?  
Yes.